


HL 12 SPECIFICATIONS

Max Working Height	12.22m	40ft 1ins
Max Platform Height	10.22m	33ft 6ins
Max Outreach	5.23m	17ft 2ins
Cage Capacity	200kg	440lbs
Travelling Height	1.92m	6ft 4ins
Overall Length	5.82m	19ft 1ins
Travelling Width	1.55m	5ft 1ins
Retracted Width	1.19m	3ft 11ins
Stabiliser Spread	2.83m	9ft 3ins
Gross Weight	1260kg	2772lbs
Rotation	360 degrees	
Power Source	Heavy Duty Batteries with a built in charger Plus mains capability as standard	

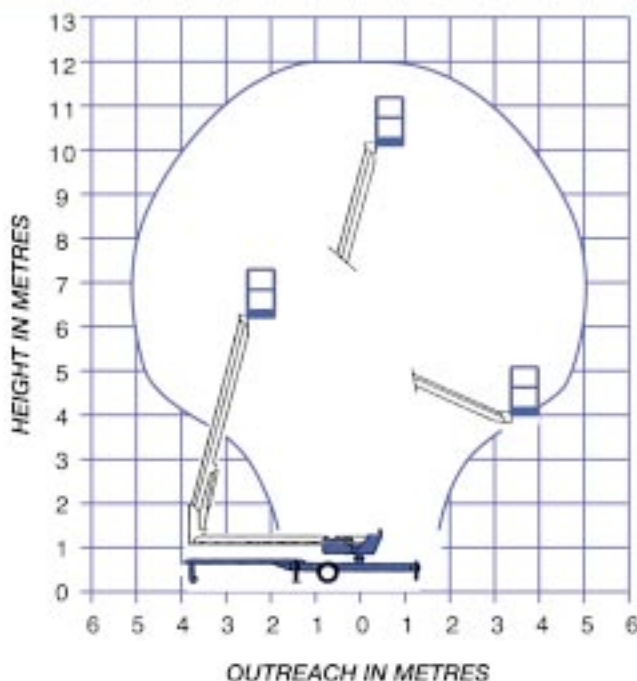

With its heavy duty chassis and boom structure the HL 12 is an extremely rigid platform but still a very versatile machine easily manoeuvred on site by one man.

The set-up procedure of the HL 12 is quick and easy using the slide out stabilisers with their built in fail safe cut out facility.

With an outreach of over 5.2m (17ft) the HL 12 gives the operator an optimum working envelope with great flexibility, which all goes together to make a simple, safe, cost-effective method of access for a multitude of applications, both inside and out.

The HL range of machines provide years of reliable service thanks to their high quality components manufactured by ourselves to our extreme standards.



Plus, with our minimum maintenance system it all goes together to make the HL range one of the best returns on your investment in the business.



ATECO

Bulldozer House, New Road
Sheerness, Kent ME12 1AU England
Tel: (+44) 01795 660 666
Fax: (+44) 01795 661 559